
































## Product Description

HBIR29/TK is a Bluetooth PIR standalone motion sensors for the track system, with 3-phase dial and one DALI channel output (80mA DALI power supply built in). HBIR29/TK also design with a metal surface box and the installation only requires simple insertion into the track, it is ideal for both commercial and domestic downlight lighting. With Bluetooth wireless mesh networking, it makes communication between luminaires much easier without time-consuming hardwiring, which eventually saves costs for projects (especially for retrofit upgrade projects). All simple device setup and commissioning can be done via Lena Lighting Clue app.






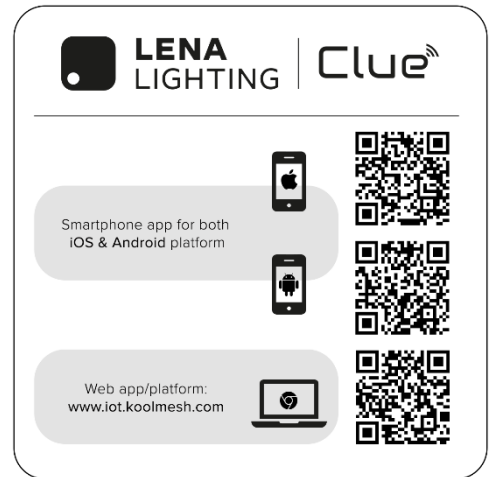
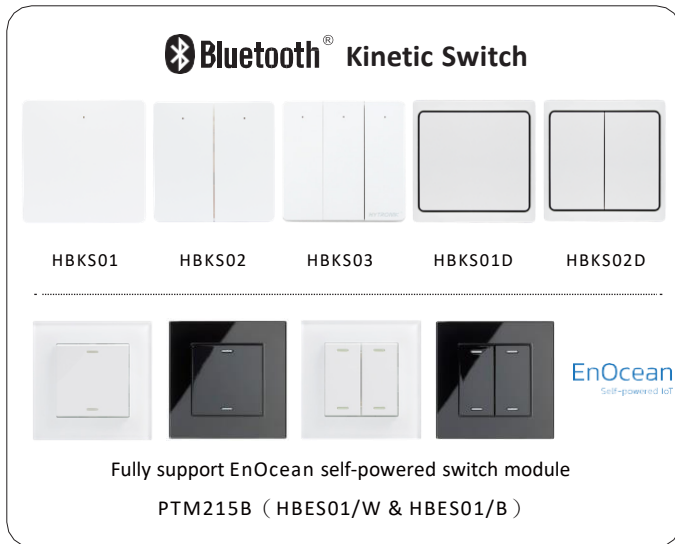
## App Features

-  Quick setup mode & advanced setup mode
-  Web app/platform for project deployment & data analysis
-  Lena Lighting Clue app on iPad for on-site configuration
-  Floorplan feature to simplify project planning
-  DALI coming soon
-  One-key device replacement
-  Device social relations check
-  Staircase function (primary & secondary)
-  Remote control via gateway support HBGW01
-  Heat map
-  Dynamic daylight harvest auto-adaptation
-  Grouping luminaires via mesh network
-  Scenes
-  Dusk/Dawn photocell (Twilight function)
-  Tri-level control
-  Daylight harvest
-  Circadian rhythm (Human centric lighting)
-  Push switch configuration
-  Detailed motion sensor settings
-  Schedule
-  Astro timer (sunrise and sunset)
-  Power-on status (memory against power loss)
-  Offline commissioning

-  Bulk commissioning (copy and paste settings)
-  Different permission levels via authority management
-  Network sharing via QR code or keycode
-  Interoperability with Bluetooth product portfolio
-  Compatible with EnOcean BLE switches
-  Internet-of-Things (IoT) featured
-  Device firmware update over-the-air (OTA)
-  Continuous development in progress...

## Hardware Features

-  80mA DALI broadcast output
-  Support to control DT8 LEDdrivers
-  Black & White Metal surface mount box
-  Blind inserts / blanking plates option
-  User-friendly design for installation
-  5-year warranty



## Technical Specifications

Bluetooth Transceiver	
Operation frequency	2.4 GHz -2.483GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	Bluetooth® 5.0 SIG Mesh

Sensor Data	
Sensor Model	PIR detection
HBIR29/TK	Installation Height : 6m Detection Range(∅) :10m
Detection angle	360°


\* For more details of detection range, please refer to "detection pattern" section.

Environment	
Operation temperature	Ta: -20°C ~ +50°C
IP rating	IP20

Input & Output Characteristics	
Operating voltage	220~240VAC 50/60Hz
Stand-by power	< 1W
DALI bus power supply	I guaranteed : 80mA I max : 250mA U rated : 15VDC
Warming-up	20s


Safety & EMC	
EMC standard (EMC)	EN55015, EN61000-3-2/-3-3, EN61547
Safety standard (LVD)	EN60669-1, EN60669-2-1 EN60570, EN61347-1/2-11
RED	EN300328, EN301489-1/-17 EN50663
Certification	CE, UKCA, RED, RCM

## Wiring – connecting two or more sensors


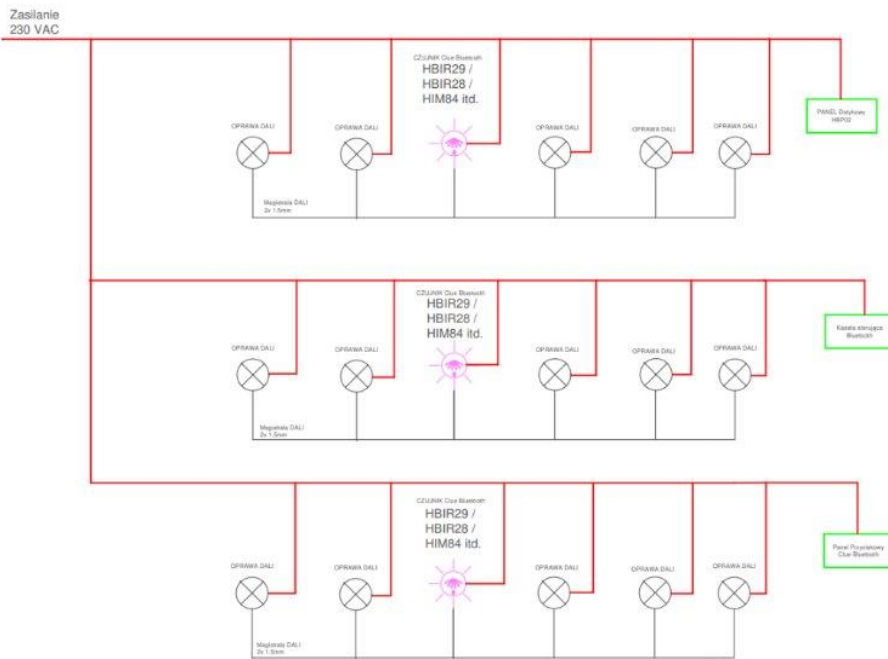


HBIR29 sensors are powered by a 3x2.5 mm<sup>2</sup> cable and connected to the DALI bus to lamps within a given zone as shown in the diagram.


**REMARK! Do not connect 2 or more sensors together via the DALI bus – this can lead to incorrect operation or even damage to the sensor.**

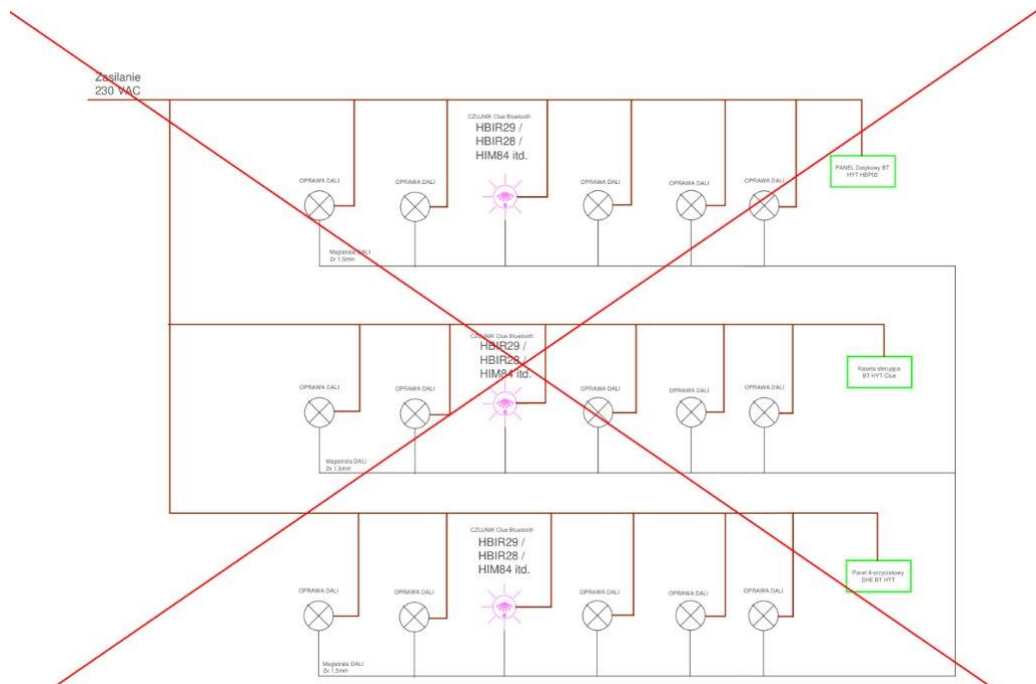

## Mechanical Structure & Dimensions

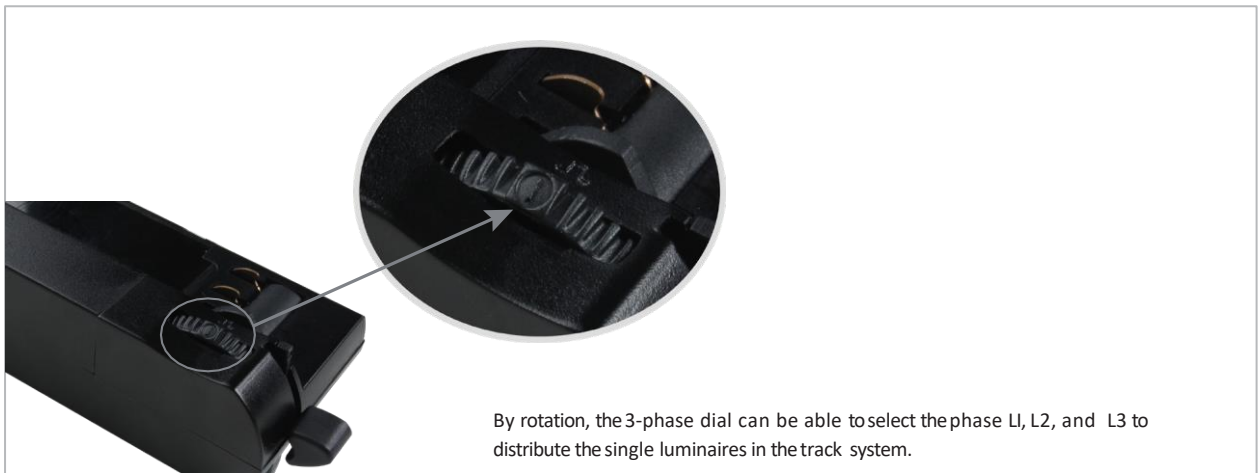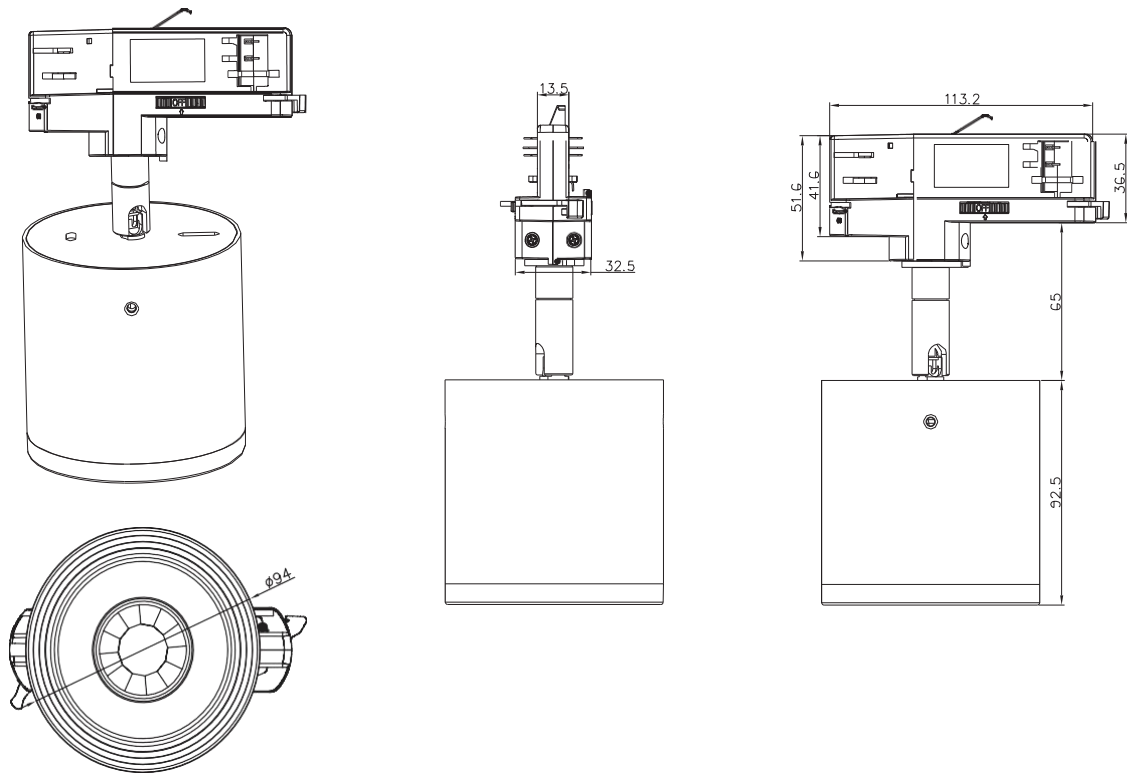


## Wire Preparation



Pluggable screw terminal. It is recommended to make connections to the terminal before fitting to the sensor.

1. 200 metres (total) max. for 1mm<sup>2</sup> CSA (Ta = 50°C)
2. 300 metres (total) max. for 1.5mm<sup>2</sup> CSA (Ta = 50°C)

## Wiring Diagram

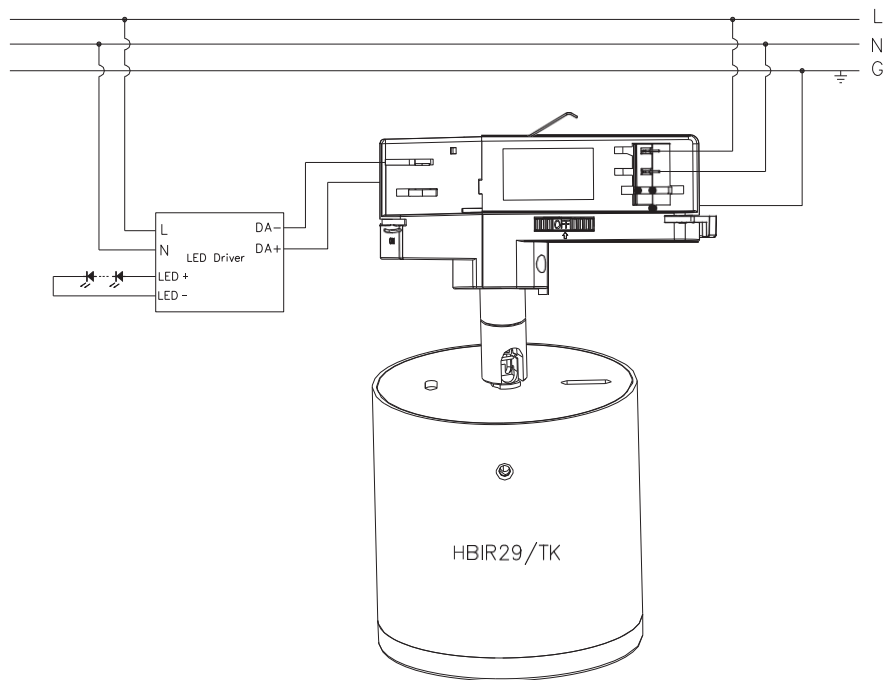

## Detection Pattern & Optional Accessory


The data below is tested under following conditions:

- Single person walking;
- Sensor not connected to any driver that may have soft-on period;
- Testing temperature  $T_a = 20^\circ\text{C}$ ;
- The testing is conducted in an open and spacious indoor field, without noticeable obstacles or influences that may affect PIR performances.

A: Tangential movement	B: Radial movement	Mount height	Tangential (A)	Radial (B)
		2.5m	max 79m <sup>2</sup> (∅ = 10m)	max 20m <sup>2</sup> (∅ = 5m)
		3m	max 79m <sup>2</sup> (∅ = 10m)	max 20m <sup>2</sup> (∅ = 5m)
		4m	max 64m <sup>2</sup> (∅ = 9m)	max 20m <sup>2</sup> (∅ = 5m)
		5m	max 50m <sup>2</sup> (∅ = 8m)	max 20m <sup>2</sup> (∅ = 5m)
		6m	max 50m <sup>2</sup> (∅ = 8m)	max 20m <sup>2</sup> (∅ = 5m)

## Placement Guide and Typical Range


### Smart Phone to Device Range

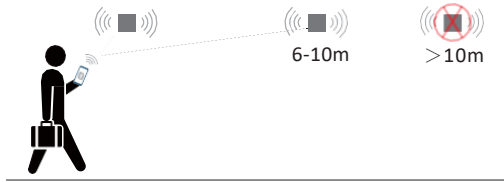


The smart device with the App installed will have a typical range of 10m, but varies from device to device. During commissioning, the installer will need to be in range of the devices when searching for devices to add to the network.

Once the devices have been added to the network via the App, the devices will start communicating within the wireless mesh. This means that once the network is complete, all devices are accessible from the smart device when in a 20m range of a single point.

### Optional Accessory – Blind Insert for Blocking Certain Detection Angles

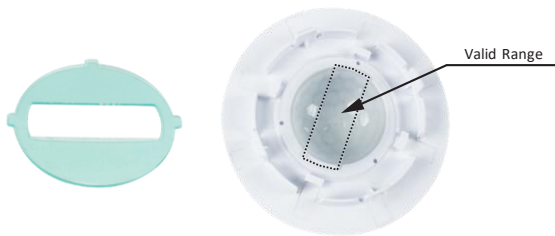

Blind Option 1 --- Aisle Detection

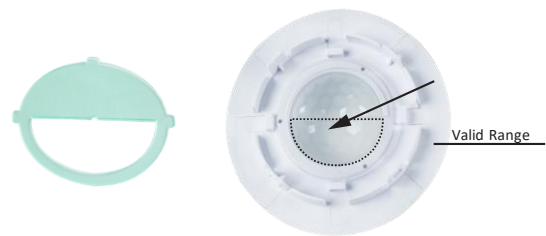

Blind Option 2 --- 180° Detection

For more information, contact [iot@lenalighting.pl](mailto:iot@lenalighting.pl)